

FIG. 1

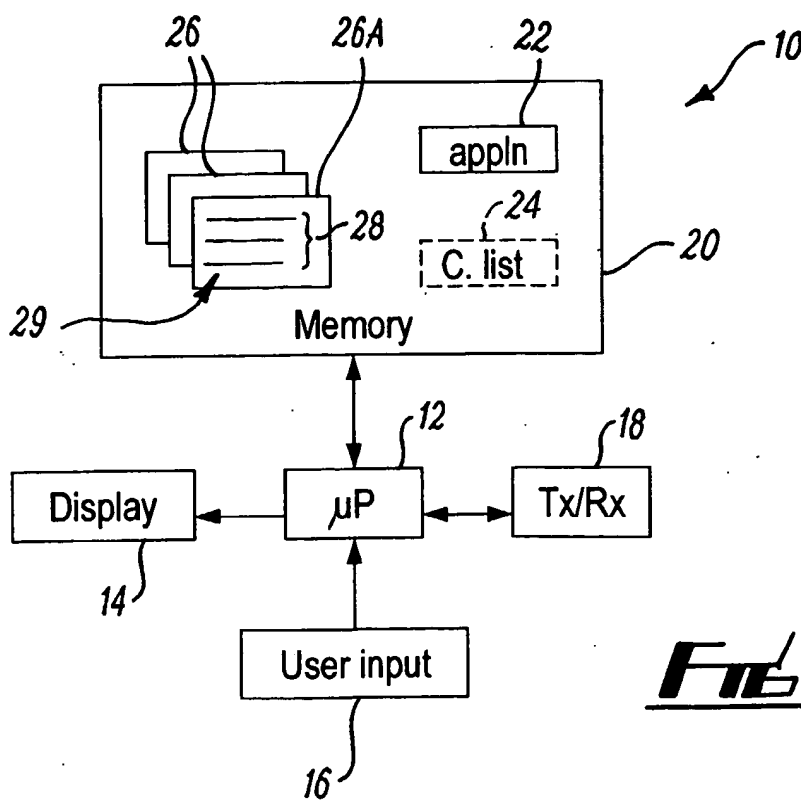
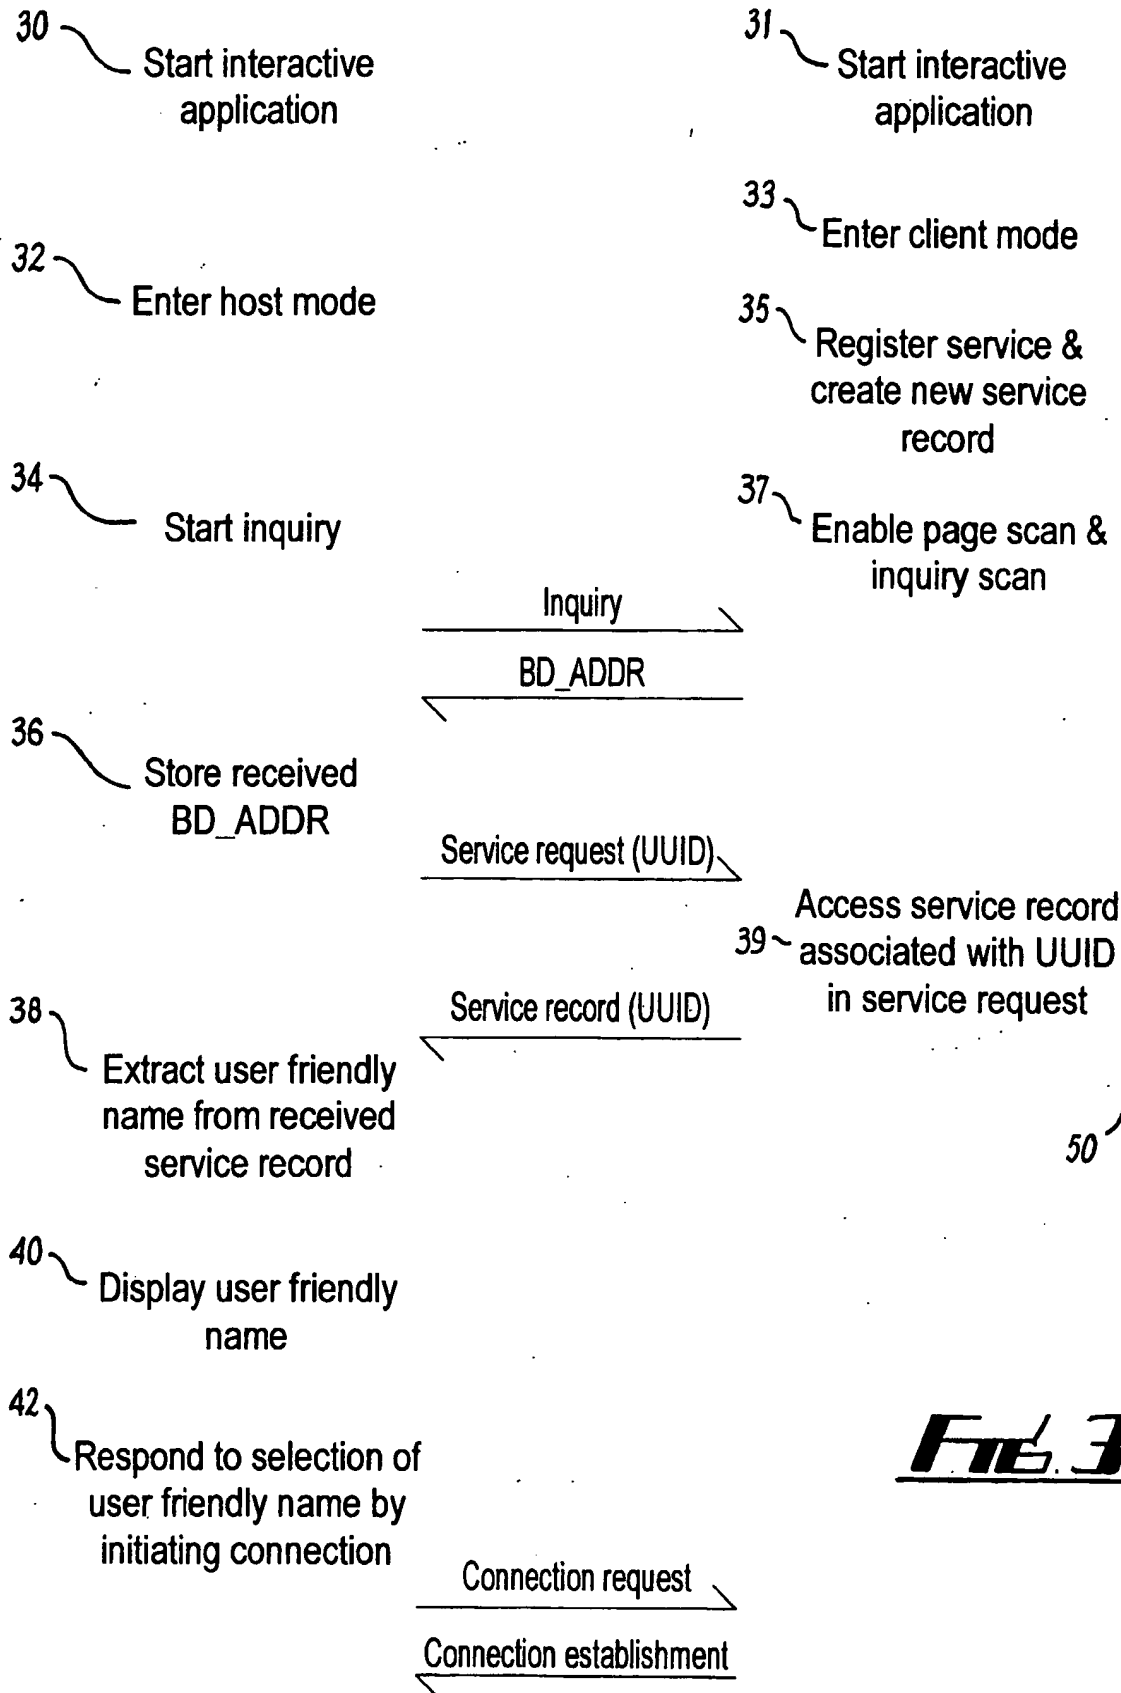



FIG. 2

First Device 10A

2/4

Second Device 10B**FIG. 3**

3/4

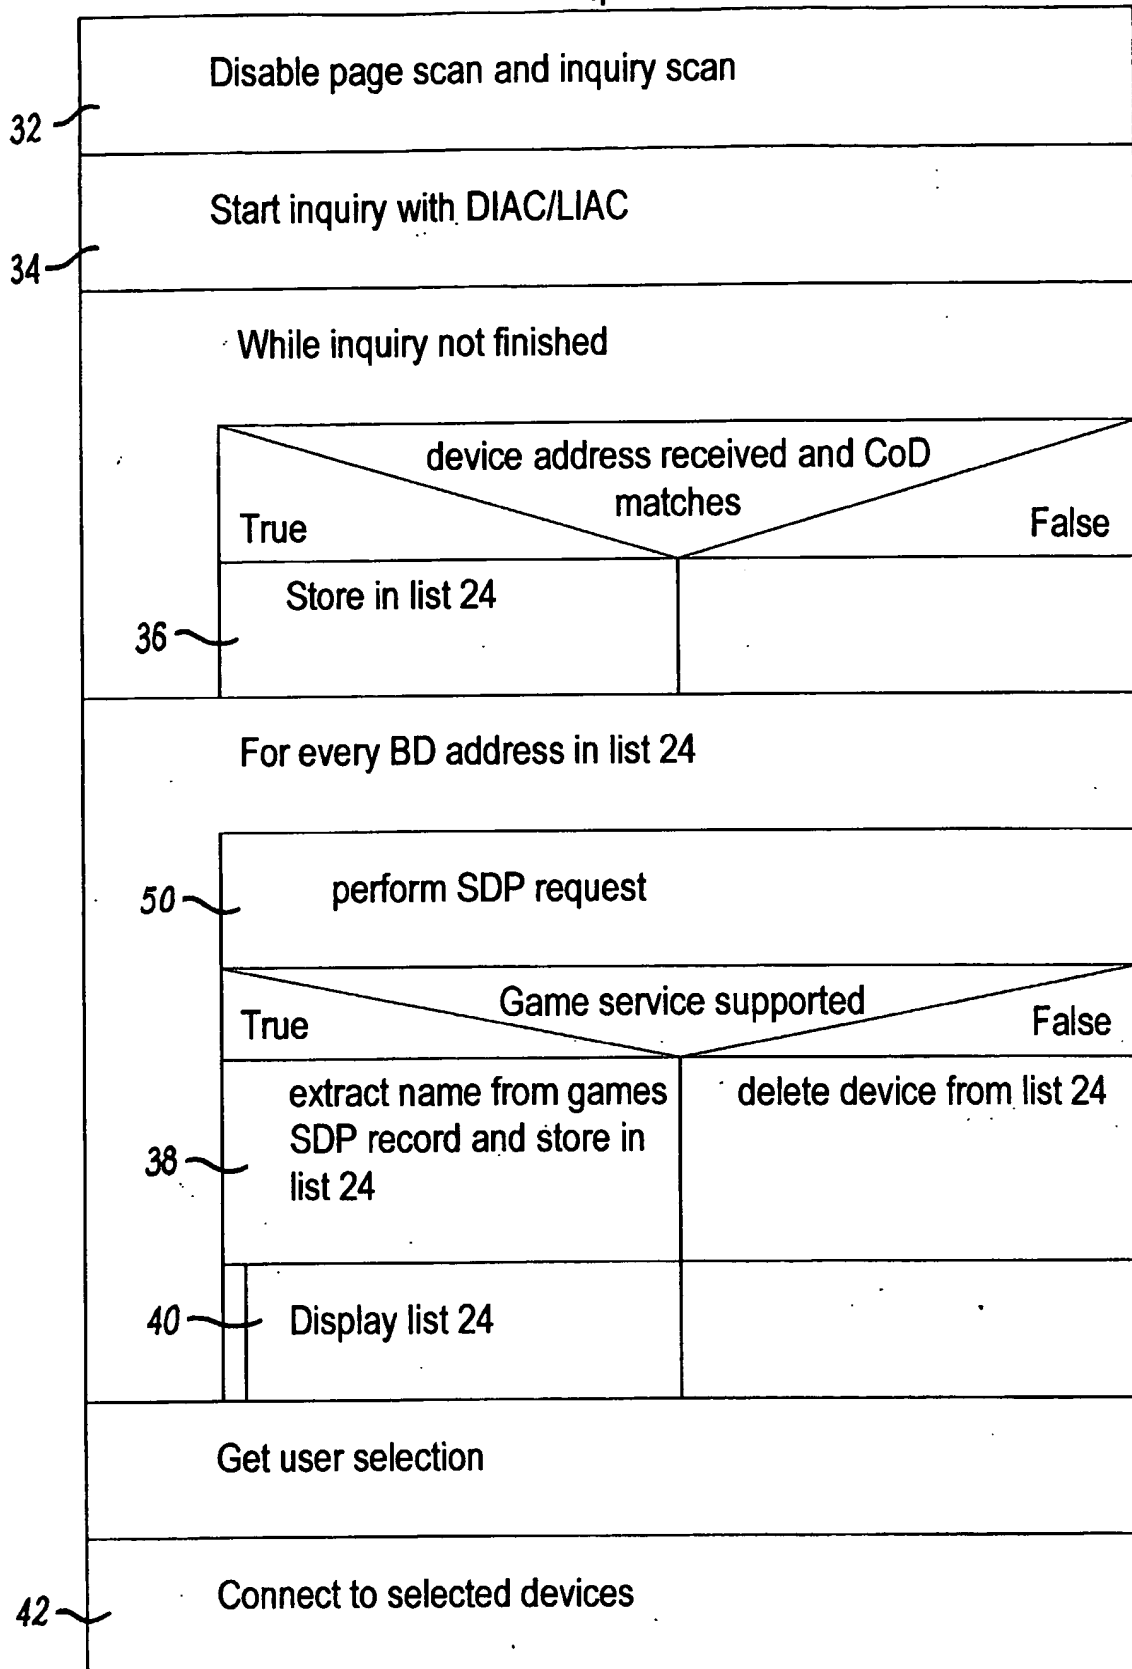***FIG. 4***

BEST AVAILABLE COPY

4/4

Register UUID and device name for the game
Set DIAC/LIAC for inquiry scan
Enable page scan and inquiry scan
Wait for incoming connection request
Present choice to join or cancel the incoming connection request
Disable page scan and inquiry scan

FIG. 5

BEST AVAILABLE COPY